UB-6000R series UB-6035R

USPS !!!

SPA Bidet Seat

Next generation standards of personal hygiene

two separated nozzles



aerated gentle wash



ultra sonic soldering water-proof seat



intelligent occupied seat sensor



convenient remote control








one touch detachable













Functions



Aerated posterior / feminine cleansing



Self cleaning



Water pressure adjustment



Gentle pulsating

cleansing



Nozzle position adjustment



Comfort oscillating cleansing



Kids



Two separated nozzles



Intensive Impulse Pulsation



Built in air-pump



Intelligent power saving

Features



Ultra sonic soldering water-proof seat



Easy to removal



Deodorizer



Circuit breaker



Warm air dryer



Self-diagnosis



Continuous water heating

Nozzle cleaning







seat sensor



Splash guard









Soft closing

Heated seat




Easy detach



Convenient remote control



* Uspa UB-6000R series may not fit certain toilet bowl designs. Please refer to the dealer sizing and installation chart.

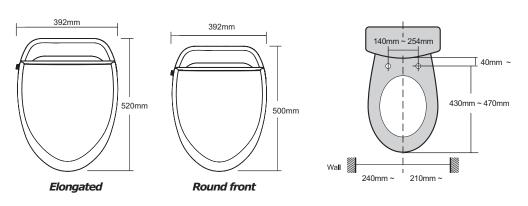

Specifications

UB-6035R Elongated Model **UB-6035RS** Round front model

230V, 50Hz, 899W Power rating Power cord 1.8m (230V)

Cleansing features Posterior wash: 900 + 100 ml / min Feminine wash: 900 + 100 ml / min

Tank capacity: 800 ml

Water temperature: Room temp ~ 40 C Heater capacity: 836W (230V)

Safety features: Thermal cut-off, Thermostat(bi-metal), Floating switch Dry features

Air temperature : Room temp ~ 60 C) Heater capacity: 250W (120V, 230V)

Safety feature: Bi-metal, Thermal cut-off

Seat temperature : Room temp ~ 40 C) Heated seat features Heater capacity: 57W (230V)

Safety feature: Thermal cut-off Air purity features Catalytic filter

(UB-6035R only) Remote control

Infrared remote control

Water supply pressure 10psi ~ 106psi (0.08mPa ~ 0.74mPa) Within 15mA - 0.1 second Circuit breaker

9.7lb (4.4kg) Net weight







manufactured by

SAMHONGTECH CO., LTD.

1488-7, WOOJUNGTOWN 9F, KWANYANG-DONG DONGAN-KU, ANYANG-CITY, GYEONGGI-DO REP OF KOREA 431-060

Tel: +82-31-420-2341~5 Fax: +82-31-426-8666

http://www.samhongtech.co.kr

Sanitaer Norge AS

distributed by

Breiløkvegen 45 NO-6409 Molde Norway

http://www.saniternorge.no

^{*} Specifications can be changed without notice.

^{*} Recommended water supply pressure is between 14psi ~ 100psi (0.09mPa ~ 0.68mPa).