
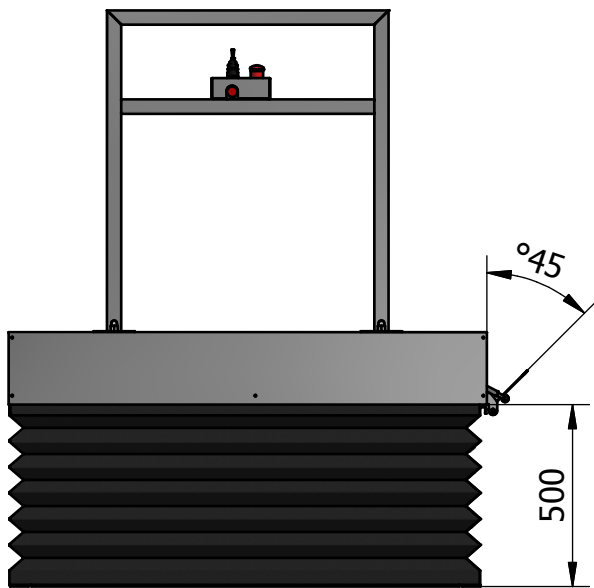


MPR LOW - UP



Technical specification

- Lifting capacity: 250Kg
- Lifting height: 500mm
- Main supply voltage: 230V AC
- Control voltage: 24V DC
- Lifting equipment: 2 pcs of linear actuators
- Lifting speed: 0,01m/sek
- Soft start/stop
- Joy-stick manouver
- Bellows

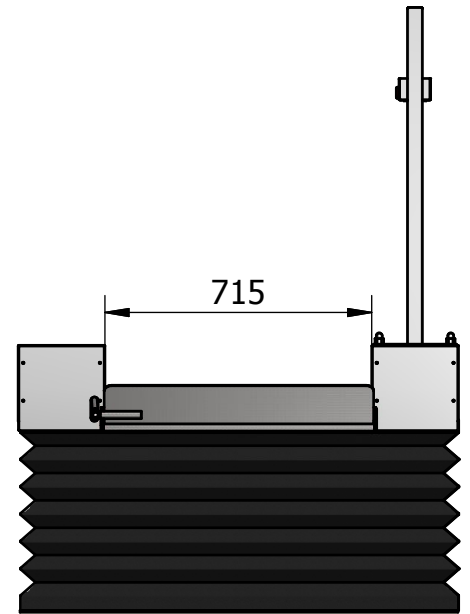

Options:

- Wider platform (915mm)
- Additional handgrip on the other side
- Manouverhandle with spiralcable
- Manouverpanels on upper and lower level
- Longer ramp (250 mm)

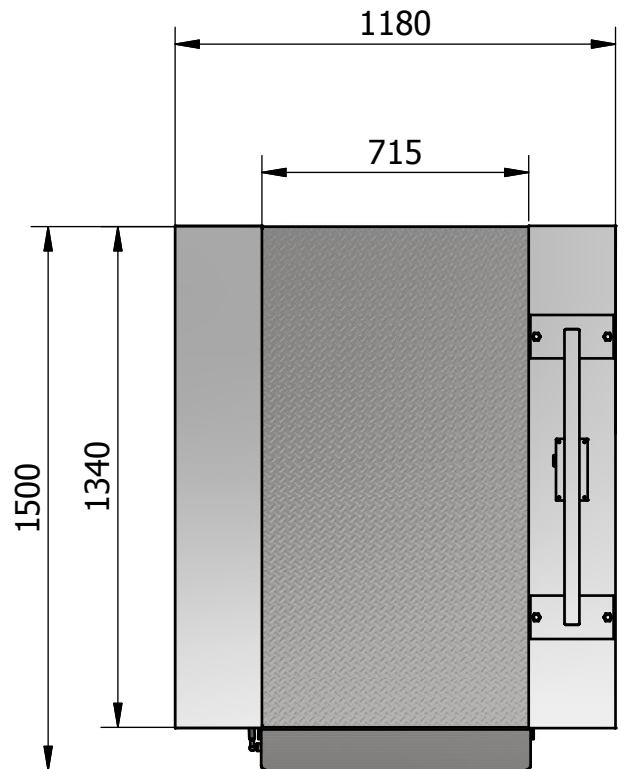
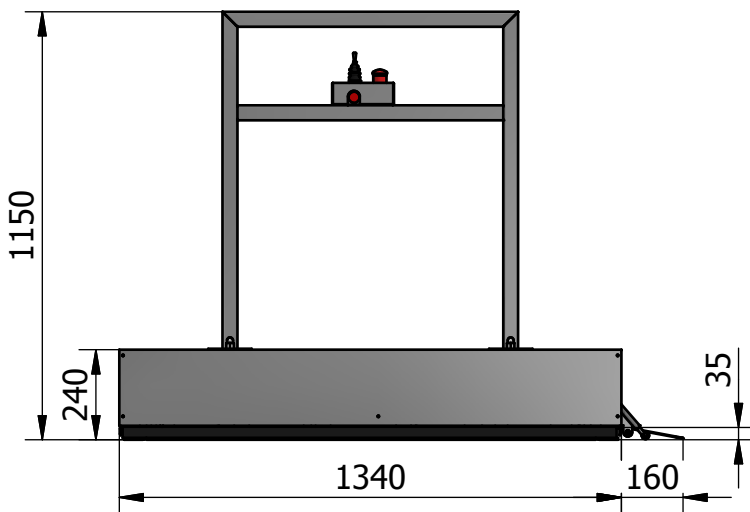


CE
Made in Sweden







MPR LOW - UP 915mm

VIEW12 (1:22)

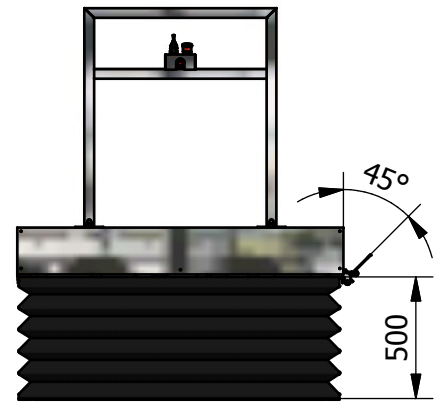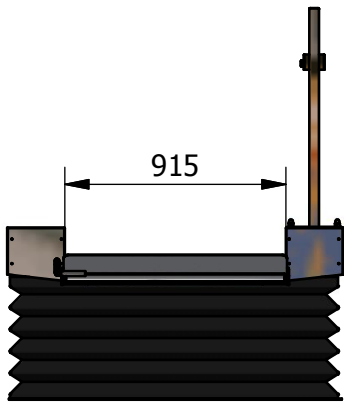

Technical specification

- Lifting capacity 250Kg
- Lifting height 500mm
- Main supply voltage 230V AC
- Control voltage 24V DC
- Lifting equipment 2 pcs of linear actuators
- Soft start/stop
- Joy-stick manouver
- Bellow

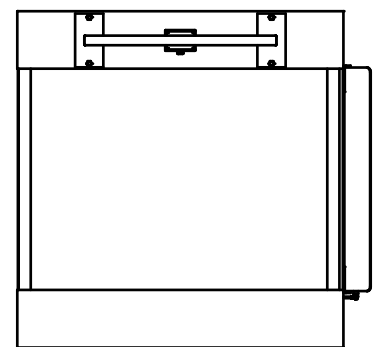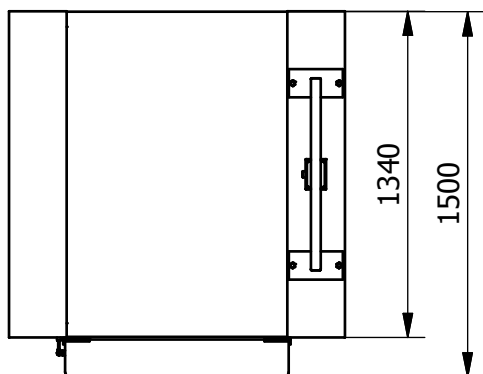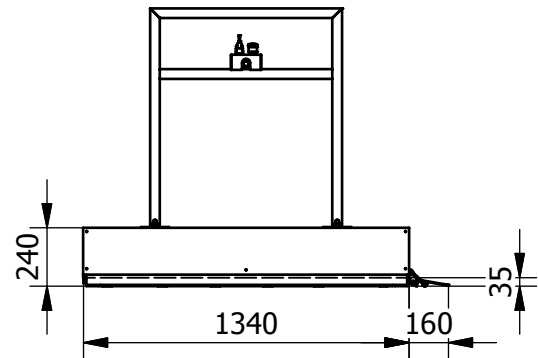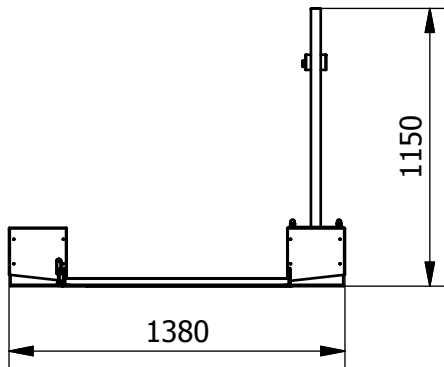

Made in Sweden



Åvägen 4, SE-23291 Arlööv, Sweden. Tel 040-43 70 75. Telefax: 040-43 29 44, Email: info@mprlift.nu
Homepage www.mprlift.com